



**Advanced Card Systems Ltd.**  
Card & Reader Technologies

# ACR122U USB NFC Reader



Technical Specifications V3.04



## Table of Contents

1.0.	Introduction .....	3
2.0.	Features .....	4
3.0.	Typical Applications.....	5
4.0.	Technical Specifications.....	6



## 1.0. Introduction



The ACR122U is a PC-linked contactless smart card reader/writer developed on the 13.56 MHz contactless technology. It is the world's first CCID-compliant contactless card reader/writer that follows both ISO 14443 and ISO 18092. This device is designed to support not only MIFARE® and ISO 14443 Type A and B cards, but also FeliCa and NFC tags.

By making use of up to 424 Kbps for NFC tag access and full USB speed of up to 12 Mbps, ACR122U can efficiently read from and write to various contactless cards/tags. It is also PC/SC-compliant which allows interoperability across different applications and platforms.

You can experience the convenience in using ACR122U, with its compact size and the various features it offers, for applications such as payment, access control, time and attendance, and mass transit.



## 2.0. Features

- USB 2.0 Full Speed Interface
- CCID Compliance
- Smart Card Reader:
  - Read/Write speed of up to 424 Kbps
  - Built-in antenna for contactless tag access, with card reading distance of up to 50 mm (depending on tag type)
  - Support for ISO 14443 Part 4 Type A and B cards, MIFARE, FeliCa, and all four types of NFC (ISO/IEC 18092 tags)
  - Built-in anti-collision feature (only one tag is accessed at any time)
- Application Programming Interface:
  - Supports PC/SC
  - Supports CT-API (through wrapper on top of PC/SC)
- Built-in Peripherals:
  - User-controllable bi-color LED
  - User-controllable buzzer
- Supports Android™ 3.1 and above<sup>1</sup>
- Compliant with the following standards:
  - EN/IEC 60950
  - ISO 18092
  - ISO 14443
  - CE
  - FCC
  - PC/SC
  - CCID
  - RoHS 2
  - KC (Korea)
  - VCCI (Japan)
  - Microsoft® WHQL

---

<sup>1</sup> Uses an ACS-defined Android Library




### 3.0. Typical Applications

- e-Government
- e-Banking and e-Payment
- e-Healthcare
- Transportation
- Network Security
- Access Control
- Loyalty Program



## 4.0. Technical Specifications

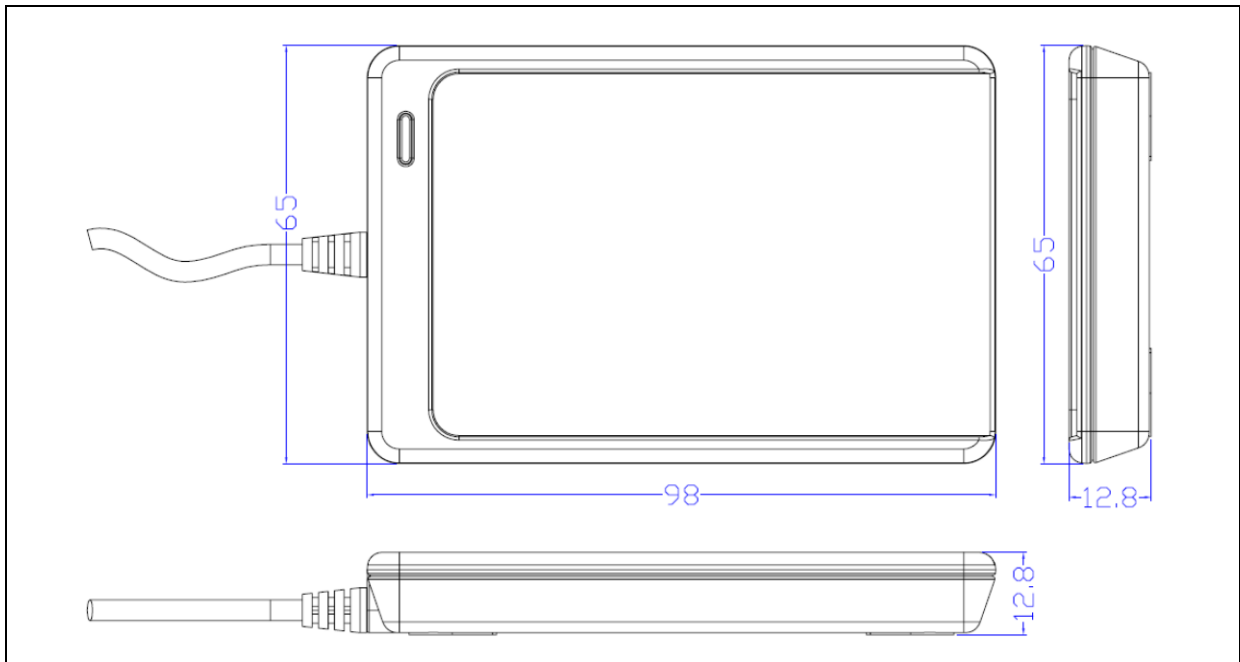

### Physical Characteristics

Dimensions .....	98.0 mm (L) × 65.0 mm (W) × 12.8 mm (H)
Weight.....	70 g
Color .....	Pearl White
Material .....	Polycarbonate (PC)

### USB Host Interface

Protocol.....	USB CCID
Type .....	Four Lines: +5 V, GND, D+ and D-
Connector Type.....	Standard Type A
Power Source.....	From USB port
Speed.....	USB Full Speed (12 Mbps)
Supply Voltage .....	5 V
Supply Current .....	Max. 200 mA
.....	100 mA (normal)
.....	50 mA (standby)
Cable Length.....	1.0 m fixed cable

### Contactless Smart Card Interface

Standard .....	ISO 14443 Type A & B, ISO/IEC 18092 (NFC), MIFARE®, FeliCa
Protocol.....	T=CL protocol
.....	FeliCa protocol
Operating Frequency .....	13.56 MHz
Operating Distance .....	Up to 50 mm (depending on tag type)
Smart Card Read/Write Speed.....	106 Kbps, 212 Kbps, 424 Kbps
Antenna Size.....	50 mm × 40 mm

### Built-in Peripherals

LED .....	1 bi-color: Red and Green
Buzzer .....	Monotone

### Application Programming Interface

PC-linked Mode.....	PC/SC
.....	CT-API (through wrapper on top of PC/SC)

### Operating Conditions

Temperature.....	0 °C – 50 °C
Humidity .....	Max. 90% (non-condensing)
MTBF .....	408,500 hrs

### Certifications/Compliance

EN/IEC 60950, ISO 14443, ISO 18092, USB Full Speed, PC/SC, CCID, CE, FCC, RoHS 2  
KC (Korea), VCCI (Japan), Microsoft® WHQL



**Device Driver Operating System Support**

Windows® 2000, Windows® XP, Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10, Windows® Server 2003, Windows® Server 2003 R2, Windows® Server 2008, Windows® Server 2008 R2, Windows® Server 2012, Windows® Server 2012 R2  
Linux®, Mac OS®, Android™



Android is a trademark of Google Inc.  
Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.  
Mac OS is a trademark of Apple Inc.  
Microsoft, Windows and Windows Vista are registered trademarks of Microsoft Corporation in the United States and/or other countries.  
MIFARE is a registered trademark of NXP B.V. and is used under license.